



JACKS & HYDRAULICS

TABLE OF CONTENTS

KTIXD63213	2	KTIXD13002	5	KTIXD61076	10
KTIXD63214	2	KTIHD63155A	5	KTIXD61077	10
KTIXD63221	2	KTIHD63186A	5	KTIXD61002	10
KTIXD63224	2	KTIHD63187A	5	KTIXD62115	11
KTIHD63230	2	KTI63194	6	KTIXD62116	11
KTIHD63250	2	KTI63197	6	KTIXD63703	11
KTIXD63228	2	KTI63198	6	KTIXD63709	11
KTI63100	3	KTIXD63505	7	KTI62110A	12
KTI63103A	3	KTIXD63136	8	KTIXD63421	12
KTI63097A	3	KTIXD63515	8	KTI63800	12
KTI63095	3	KTIXD63517	8	KTI63716A	12
KTI63131B	3	KTI61201	9	KTI63611A	13
KTI63094	4	KTIXD61202	9	KTIXD63619	13
KTI63099A	4	KTIXD61205	9	KTIHD63630	13
KTIXD63105	4	KTIXD61211	9	KTIHD63650	13
KTIXD63133	5	KTIHD61222	9		



K-Tool International — Quality Within Reach

Innovative, high-quality products at a price you can afford.

Ask your tool and equipment dealer about our reliable shop products.



12 Ton, 20 Ton, & 30 Ton Welded Bottle Jacks

KTIXD63213, KTIXD63214, KTIXD63221, KTIXD63224, KTIHD63230

- + Ram extension screw adjusts height to get full use of ram travel
- + Load-limiting and bypass valves prevent against over loading and over extension of ram
- + Ductile iron hydraulic base for added strength
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KTIXD63213 Capacity: 12 Tons, Lifting Range: 8.5" - 15.8"

KTIXD63214 Capacity: 12 Tons, Lifting Range: 7.5" - 13.8"

KTIXD63221 Capacity: 20 Tons, Lifting Range: 9.6" - 16.7"

KTIXD63224 Capacity: 20 Tons, Lifting Range: 7.3" - 13.4"

KTIHD63230 Capacity: 30 Tons, Lifting Range: 11.2" - 18.3"



50 Ton Welded Bottle Jack

KTIHD63250

- + Lifting Range: 11.8" - 18.8"
- + Thick steel hydraulic base for maximum strength
- + Three-piece snap-fit pump handle for easy pumping and storage
- + Load-limiting and bypass valves prevent against over loading and over extension of ram
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



20 Ton Air/Hydraulic Bottle Jack

KTIXD63228

- + Lifting Range: 10.4" - 19.9"
- + Air/hydraulic pump reduces lifting time and provides ease of operation
- + Load limiting and bypass valves prevent use beyond rated capacity and over extension of ram
- + Additional adjustable screw 3.3"
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standard



1.5 Ton Scissor Jack

KT163100

- + For tire changing and snow chain installation
- + Lifting range from 4.1" to 15.2"
- + Large base for added stability
- + Long crank handle for ease of turning under load
- + All steel construction in a compact design for storage
- + 1 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



2 Ton Jacks

KT163103A, KT163097A, KT163095

- + Lightweight and compact design for easy handling and storage
- + Load-limiting and bypass valves prevent against over loading and over extension
- + Grab handle for easy positioning and carrying
- + 1 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KT163103A Trolley Jack Lifting Range: 5.3" to 13.2"

KT163095 Service Jack Lifting Range: 3.35" to 14.96"

KT163097A: Trolley Jack (KT163103A) and Jack Stands Combo



3 Ton Compact Service Jack

KT163131B

- + Lifting range: 5.3" - 18.5 "
- + Sealed hydraulic power unit prevents contaminants from entering system
- + Load-limiting and bypass valves prevent use beyond rated capacity and over extension of ram
- + Wide track front wheels and rear swivel casters for easy maneuverability
- + 1 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1.5 Ton Aluminum Racing Jack

KT163094

- + Double-piston hydraulic floor jack raises the vehicle quickly; 7 strokes (no load)
- + Lifting range: 3-5/8" - 14-1/4"
- + Low profile design for low clearance vehicles
- + Swivel saddle & swivel rear casters for easy positioning
- + Lightweight for ease of use



3 Ton Aluminum Service Jack

KT163099A

- + Very strong, 3 ton capacity, but only weights 55.8 lbs.
- + Dual pump system for quick lifting (7 strokes to top under no load)
- + Lifting range: 3-3/4" - 19-1/4"
- + "D" Side handles for easy positioning
- + 2 piece handle for easy storage. Includes handle pad for protecting the vehicle
- + 2 Year warranty
- + Complies With ASME PASE/2019 Safety Standards



2 Ton Extra Long Low Profile Service Jack

KTIXD63105

- + Allows for easy access under low ground clearance vehicles
- + Lift range from 2.8" - 24"
- + Saddle diameter 3.9"
- + 45.3" long pump handle for easy pumping under load
- + Dual pump piston power unit raises saddle to maximum height in 8 full incremental pump strokes with no load
- + Load-limiting and bypass valves to prevent use beyond rated capacity and over-extension of ram
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



Low Profile Service Jacks

KTIXD63133, KTIXD13002

- + Low profile service jack for easy access under low ground clearance vehicles
- + Lift range from 3.5" to 21.4"
- + 50" long pump handle for easy pumping under load
- + Load-limiting and bypass valves to prevent use beyond rated capacity and over-extension of ram
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KTIXD63133 Capacity: 3.3 Tons, 8 pumps to max height (no load)


KTIXD13002 Capacity: 3.5 Tons, 4 pumps to max height (no load)



5 Ton Service Jack

KTIHD63155A

- + Fast to load - no foot pedal needed
- + Lift range from 5.8" - 22"
- + Release knob works independently of handle position
- + Load-limiting and bypass valves prevent jack from being used beyond rated capacity and over-extension of ram
- + Handle locks in either vertical, 45°, or horizontal positions
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

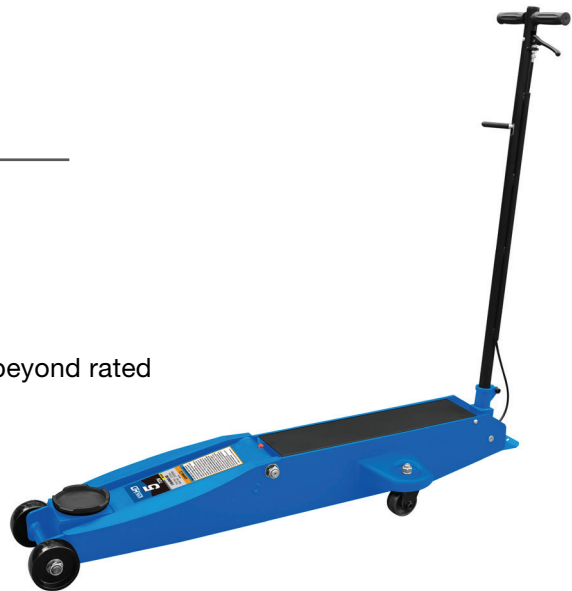

10 Ton Service Jacks

KTIHD63186A, KTIHD63187A

- + Fast to load - 5 pumps to maximum height under load
- + Release knob works independently of handle position
- + Load-limiting and bypass valves prevent jack from being used beyond rated capacity and over-extension of ram
- + Handle locks in either vertical, 45°, or horizontal positions
- + Heavy-duty steel construction provides stability and endurance
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KTIHD63186A Jack: Lift range from 6.3" to 22.5"

KTIHD63187A Jack with air-operated motor assistance: Lift range from 6.3" to 25.5"



22 Ton Air Hydraulic Truck Jack

KTI63197, KTI63194

- + Lift range from 9" to 18"
- + Narrow width fits between tandem wheels
- + Load-limiting and bypass valves prevent use beyond rated capacity and overextension of ram
- + Spring activated self retracting ram
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KTI63197 Truck Jack with Spring Release

KTI63194 Truck Jack with Air Control System

Spring Release
(KTI63197)

Springs return
the ram to the
low position



Operated UP by depressing the
air valve on the hose, DOWN
by manually turning the release
knob on the top of the handle

Air Control
(KTI63194)

No return
springs
needed



50 Ton Air Hydraulic Truck Jack

KTI63198

- + Lift range from 11.4" to 21.3"
- + Narrow width fits between tandem wheels
- + Load-limiting and bypass valves prevent use beyond rated capacity and over-extension of ram
- + Spring activated self-retracting ram
- + Release knob at top of T handle works at any handle position
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1000 Lb Single Stage Transmission Jack

KTIXD63502


- + Capacity: 1,000 lbs.
- + Lifting Range: 43.7" - 71"
- + Saddle tilt: 23 degrees forward and 16 degrees backward
- + For automotive use up to light duty pickup trucks
- + Foot pedal activation easily raises single ram under load
- + Overload valve prevents jack from being used beyond its rated capacity
- + Speed limiting valve ensures an automatic safe speed descent - not greater than 1" per second
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1000 Lb 2-Stage Telescopic Transmission Jack

KTIXD63505

- + Capacity: 1,000 Lbs
- + Lifting Range: 35" to 74.2"
- + Speedy pump foot pedal raises telescopic rams to load quickly
- + Foot pump and release pedals provide hands free operation to align saddle with transmission
- + Four caster wheels for easy transportation and maneuverability
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

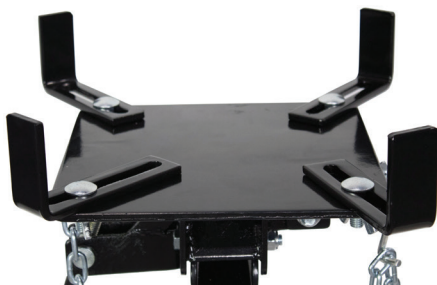

Fuel Tank Adapter

KTIXD63136

- + Quick and easy installation to all underhoist transmission jack saddles
- + Universal adapter plate included for mounting to all other under hoist jack saddles
- + Length, width, and height adjustments to handle any fuel tank configuration up to 40 gallon capacity
- + Four 3" by 5.5" foam support pads self adjust and protect the tank from damage
- + Ground wire assembly can be used with older metal tanks to prevent against static electric discharge
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1200 Lb Low Profile Transmission Jack

KTIXD63515


- + 1200 pound capacity transmission jack with a lift range from 7.1" to 31.5"
- + For automotive use up to pickup truck transmissions
- + Wide front-open chassis for lower profile when loaded
- + Full swivel pump handle can be accessed in any work position
- + Fully adjustable universal saddle with load securing hardware
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1.5 Ton Truck Transmission Jack

KTIXD63517

- + 1.5 ton capacity truck transmission jack with lift range from 8.6" to 36.6"
- + Front and back swivel casters allow for trouble-free positioning and maneuverability
- + Pump handle rotates 360° for multiple work positions
- + Universal saddle with tilt features including positioning hook
- + Load restraint system included
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standard

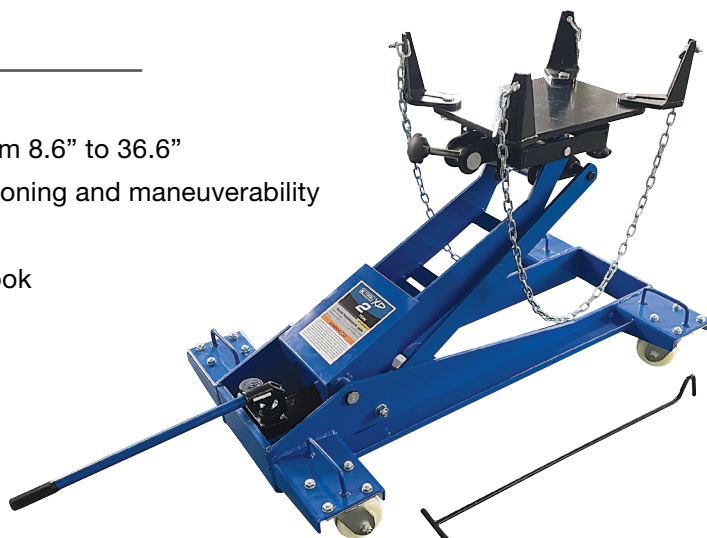

Jack Stands (Pairs)

KT161201, KTIXD61202, KTIXD61205

- + Designed to be used in pairs
- + Steel base with four feet pads for stability
- + Ratchet action design with ductile iron support column
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KT161201 Capacity: 2 Ton, Lifting Range: 10.8" to 16.7"

KTIXD61202 Capacity: 3 Ton, Lifting Range: 11.6" to 16.7"

KTIXD61205 Capacity: 6 Ton, Lifting Range: 15.8" to 24"



12 Ton Jack Stands (Pair)

KTIXD61211

- + Lifting Range: 19.6" to 30.3"
- + Added locking pin design feature provides extra security
- + Steel square base with foot pads for added strength and stability
- + Ductile iron column supports load off the ground
- + Weight: 52.9 lbs
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



22 Ton Jack Stands (Pair)

KT1HD61222

- + Lifting Range: 11.8" to 19.8"
- + Height adjustment pin connected to base by way of lanyard to prevent against loss
- + Steel plate and structural tubing for added strength and stability
- + V-shaped saddle to cradle axles and other truck components
- + Sold and to be used in pairs
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



3/4 Ton Utility Underhoist Stand

KTIXD61076, KTIXD61077

- + 3/4 ton under hoist stand designed to support under car components
- + Support range from 53" to 79"
- + Acme threaded screw for self-locking positioning
- + Bearing mounted spin handle for easy raising and lowering of screw
- + 12" diameter base with 1.6" x 5.5" saddle provide additional support
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards

KTIXD63502 Underhoist Stand

KTIXD63505 Underhoist Stand with Pedal:

Foot pedal can raise another 1.3" under 400 pounds of load



2 Ton Tripod Underhoist Stand

KTIXD61002

- + 2 ton under hoist stand designed to help stabilize a vehicle suspended by an above-ground lift
- + Support range from 68" to 76"
- + Acme threaded screw for 8" of fine adjustment
- + Bearing mounted spin handle for easy raising and lowering of screw
- + 24" triangle shaped base and 3.3" square saddle provide additional stability
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1500 Lb. Capacity Engine Sling

KTIXD62115

- + Designed use with an engine crane to level a load or adjust at a specific angle for installation and removal
- + Hand crank and bearing mounted drive screw for easy adjustment
- + Four mounting chains and brackets for quick attachment to engine
- + Weighs 14.3 lbs
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1000 Lb Capacity Engine Support Bar

KTIXD62116

- + 1000 pound capacity transverse bar extends from 34.5" to 61"
- + Engine attachment and adjustment hardware included
- + Designed to support front wheel drive engines for repairs or servicing of engine mounts
- + Includes support leg for handling larger engines or engines requiring three support points
- + Weight 41.9 lbs
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



4 Ton Portable Ram Kit

KTIXD63703

- + 4 ton portable ram kit for spreading, bending, pushing, and clamping applications
- + Hand pump and 10.5" long ram with 4.8" stroke
- + Basic attachments, .5 ton spreader ram, and five extension tubes included
- + Force gauge to measure force applied to work
- + Snap-fit design for quick attachment and tube connections
- + Heavy duty storage case
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



10 Ton Portable Ram Kit

KTIXD63709

- + 10 ton portable ram kit for spreading, bending, pushing, and clamping applications
- + Hand pump and 12.6" long ram with 5.1" stroke
- + Basic attachments, .5 ton spreader ram, and four extension tubes included
- + Force gauge to measure force applied to work
- + Snap-fit design for quick attachment and tube connections
- + Heavy duty storage case with wheels
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1000 Lb Capacity Geared Engine Stand

KT162110A

- + 1000 pound capacity foldable engine stand for convenient storage when not in use
- + 63:1 gear ratio for fine adjustment
- + Four wheel design with locking caster wheels to prevent stand from moving
- + Made of structural steel plate and tubing for added strength
- + Weighs 96 lbs
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



1.5 Ton Capacity Foldable Engine Crane with Fast Rise

KTIXD63421

- + Four different boom positions with 750/1,500/2,250/3,000 lb. capacity engine crane
- + Legs and boom fold quickly for storage
- + Fast rise pump without a load
- + 48" long boom with chain and swivel hook included
- + 4.3" low profile base for easy access under low ground clearance vehicles
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



Hand Pallet Jack

KT163800

- + High quality welded steel construction and powder-coated finish
- + Capacity: 6500 lbs.
- + Lowered fork height: 3", Max lift height: 7"
- + Fork width: 27", Fork length: 48"
- + Turning radius: 210°
- + Weight: 187 lbs.



Air Hydraulic Foot Pump

KT163716A

- + 10,000 PSI air/hydraulic foot pump requires 90 PSI air pressure
- + Designed to be used with single acting cylinders
- + Provides hands free operation for pumping and releasing load
- + Usable fluid capacity 98 cubic inches
- + Flow rate 42 cu. in. with no load
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



12 Ton Shop Press

KT163611A

- + 12 ton shop press with double speed fast pump
- + Pump, 6.9" stroke self-retracting ram and hose with glycerine filled gauge
- + Multi-position bed for easy work height adjustment
- + High quality large diameter hydraulic steel press cylinder has integrated return spring
- + 53" frame height, 21.5" width, and 27.5" base leg length
- + 2 Year Warranty on material and workmanship
- + Complies With ASME PASE/2019 Safety Standards



20 Ton Manual Hydraulic Shop Press

KTIXD63619

- + 20 ton shop press with strong steel frame and channel construction
- + Pump, 7.3" stroke self-retracting ram and hose with glycerine filled gauge
- + Cylinder can be positioned left or right
- + 4 height adjustments of 3.4" increments for press bed
- + 59.5" frame height, 25.3" width, and 27.5" base leg length
- + 2 Year Warranty on material and workmanship
- + Complies with ASME PASE/2019 Safety Standards



30 Ton Manual Hydraulic Shop Press

KT1HD63630

- + 30 ton shop press with strong steel frame and double speed pump
- + Pump, 6" stroke self-retracting ram and hose with glycerine filled gauge
- + Cylinder can be positioned left or right
- + 9 height adjustments of 4.3" increments for press bed
- + 65.25" frame height, 28.3" width, and 27.5" base leg length
- + 2 Year Warranty on material and workmanship
- + Complies with ASME PASE/2019 Safety Standards



50 Ton Air/Hydraulic Shop Press

KT1HD63650

- + 50 ton shop press with anti shock pressure gauge and stainless steel frame
- + Double speed pump, 7.5" stroke, and powerful air motor
- + Self-locking hand winch
- + 6 height adjustments of 5.5" increments for press bed
- + 67" frame height, 43.5" width, and 31.5" base leg length
- + 2 Year Warranty on material and workmanship
- + Complies with ASME PASE/2019 Safety Standards

